


Aluminium column SAL-C2

diameter 120 mm at the base plate

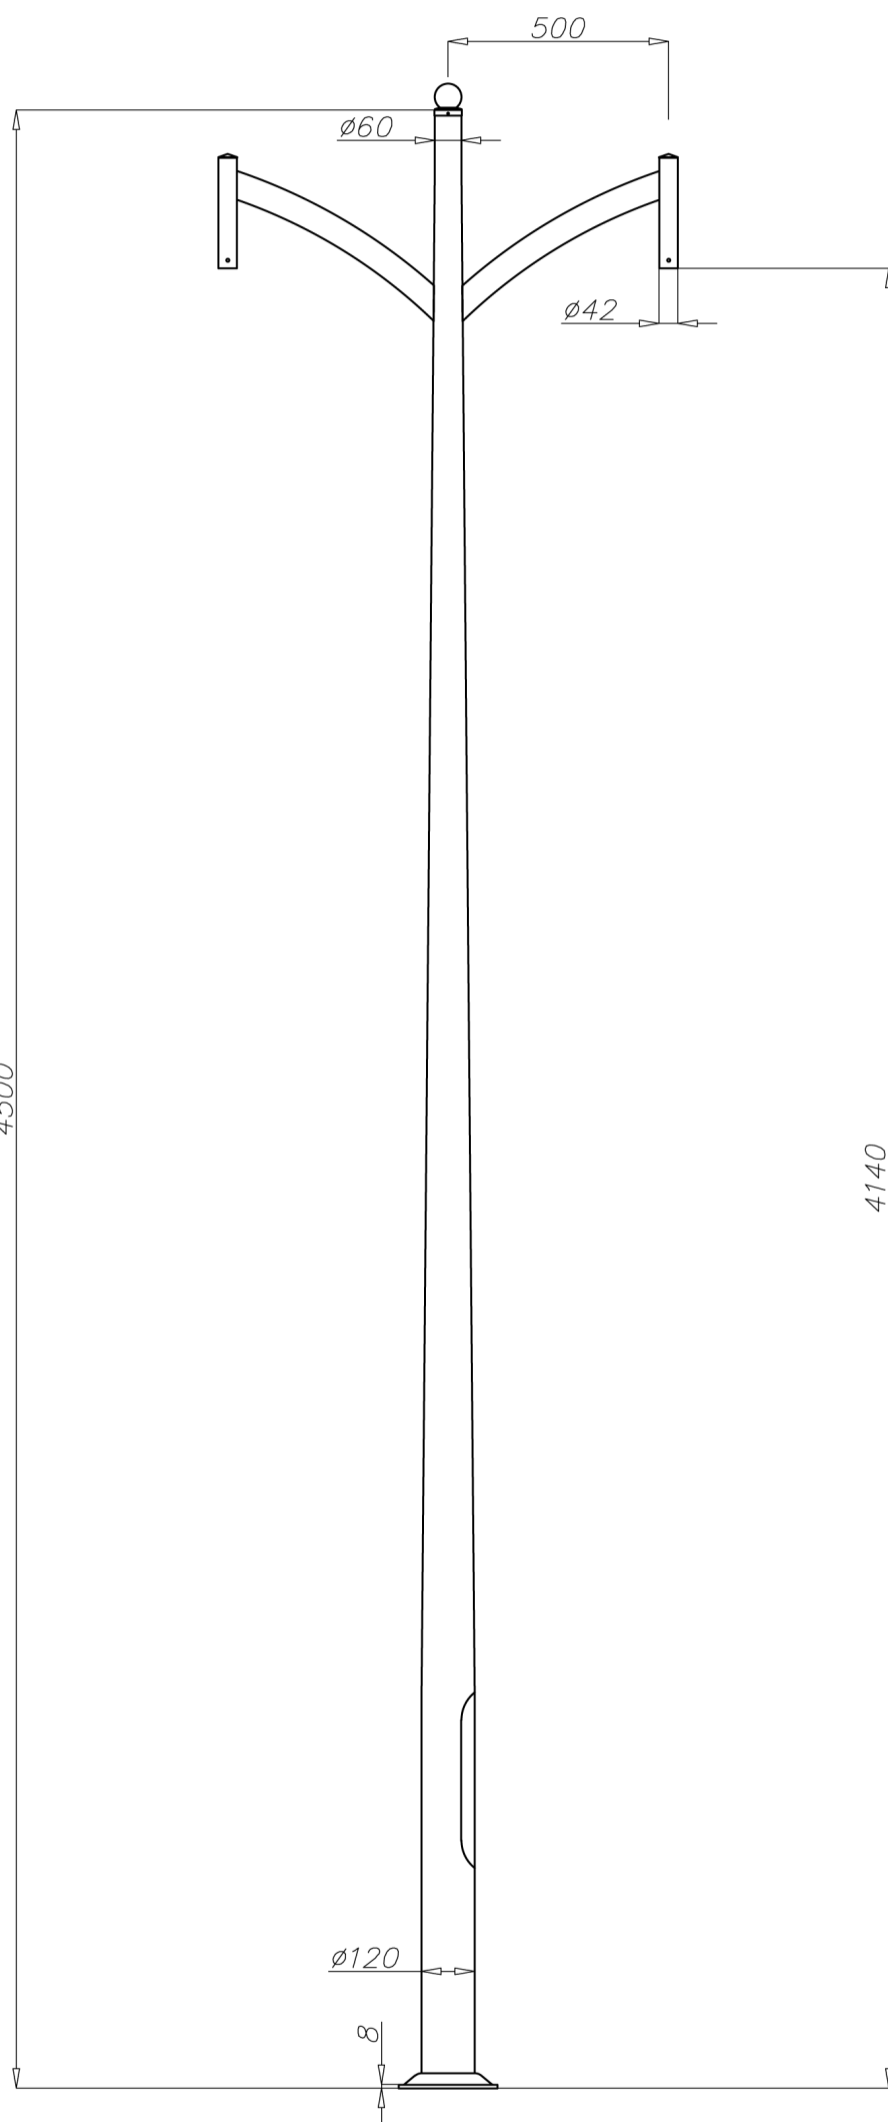

Technical data

Aluminium Column	SAL-C2
Product code	42214
Column height H [m]	4,5
Wall thickness [mm]	4
Net weight [kg]	18,0
Orientacyjna objętość jednostkowa [m ³]	0,435
Post top column	luminaires with $\varnothing 42$ spigot entry with weight and windage not exceeding data in resistance calculations
Concrete footing / reinforcement basket	B-50 / Z-50
Concrete footing code/reinforcement basket code	311150 / 311205
Hot galvanized nut set /Hot galvanized ripable nut set	4006 / 4007

Resistance calculations

SAL-C2 kod 42214	acceptable mass of single luminaire [m ²] for Cx=1			
	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
acceptable mass of luminaires kg]	I zone, II location category	I and III zone, II location category to 450m AMSL	II zone, II location category	III zone, II location category to 755m AMSL
10	0,31	0,25	0,17	0,15

- surface: polished aluminium
- anodising in 10 colours, each with possibility of brightening
- option of powder painting in RAL colours (other colours available on request)
- elastomer protection option in the color of the column to a height of 350 mm (other height on request)
- ROSA standard wiring chamber
- packing: sleeve material
- possibility of fixing the light endings
- passive safety certificate 100NE2

