


Aluminium column SAL-80H

diameter 146 mm at the base plate

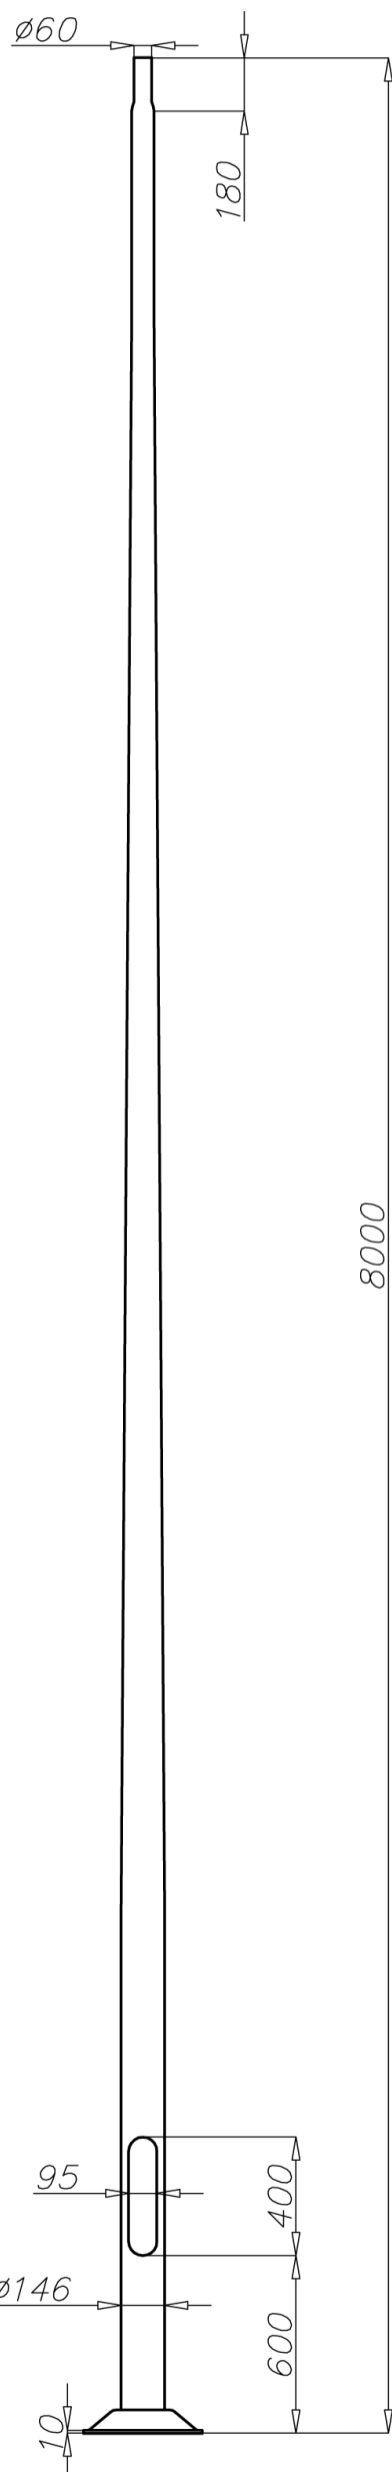

Technical data

Aluminium Column	SAL-80H
Product code	42340
Column height H [m]	8
Wall thickness [mm]	4,2
Net weight [kg]	36,9
Volume [m ³]	0,523
Post top column	luminaires with $\varnothing 60$ spigot entry with weight and windage not exceeding data in resistance calculations
Compatible extension arms	according to resistance calculations
Concrete footing / reinforcement basket	B-71 / Z-71
Concrete footing code/reinforcement basket code	311171 / 311271
Hot galvanized nut set /Hot galvanized ripable nut set	4012 / 4013

Resistance calculations

SAL-80H code 42340		acceptable windage of single luminaire [m ²] for Cx=0,7			
		Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
extension arm type	acceptable weight of single luminaire	I zone, II location category	I and III zone, II location category to 450m AMSL	II zone, II location category	III zone, II location category to 755m AMSL
WR-1/1	15	0,36	0,27	0,16	0,13
WR-2/1	15	0,24	0,16	x	x
WR-3/1	15	0,22	0,15	x	x
WR-4/1	15	0,33	0,25	0,14	x
WR-15/1	15	0,22	0,14	x	x
WN-1	15	0,34 (Cx=1)	0,26 (Cx=1)	0,17 (Cx=1)	0,14 (Cx=1)

SAL-80H code 42340		acceptable windage of luminaires and extension arms [m ²] for Cx=1			
		Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
acceptable mass of luminaires and extension arms [kg]		I zone, II location category	I and III zone, II location category to 450m AMSL	II zone, II location category	III zone, II location category to 755m AMSL
30		0,36	0,28	0,18	0,16

- surface: polished aluminium
- anodising in 10 colours, each with possibility of brightening
- option of powder painting in RAL colours (other colours available on request)
- elastomer protection in the color of the column to a height of 350 mm (other height on request)
- ROSA standard wiring chamber
- packing: sleeve material
- passive safety certificate 100NE2

