


Distribution curve SAL DECO-3 LED

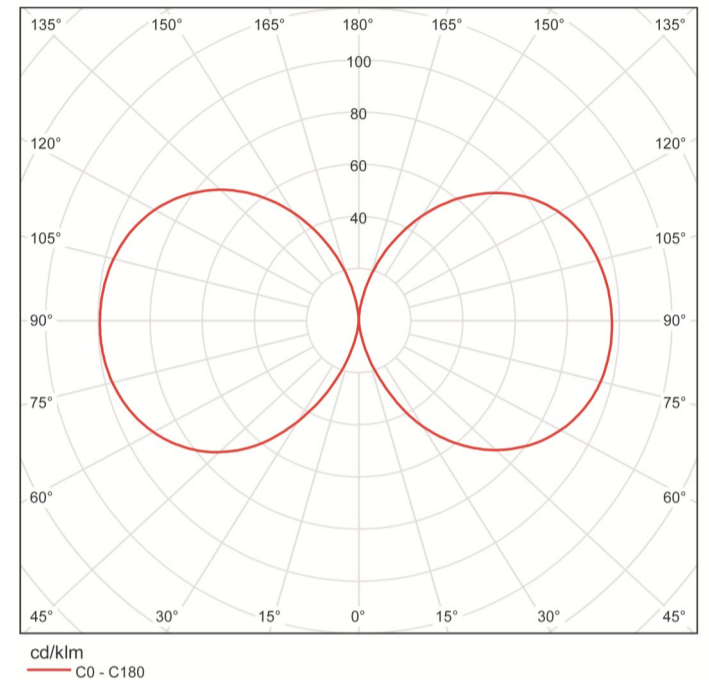

Technical data

Column	SAL DECO-3 LED
Code	42923
Electrical class	II
Ingress protection	IP65
LEDs type	CREE XT-E
Correlated colour temperature [K]	5 000
LEDs power [W]	48
LEDs quantity	24
Nominal input voltage [V]	120-277 AC
Frequency [Hz]	50/60
Luminaire efficacy [lm/W]	44
Power consumption [W]	56
Luminous flux * [lm]	2 500
Supply current [mA]	700
Height [mm]	3 500
Diameter at the base plate [mm]	180
Setup	lamp diffuser made of UV resistant polycarbonate; aluminium decorative elements
Weight [kg]	28
Volume [m ³]	0,12
Foundation / reinforcing cage	B-51 / Z-51
Foundation code/ reinforcing cage code	311151 / 311251
Regular bolts set	4008
Shear bolts set	4009

* due to the precision class of diodes tolerance is +/- 3%

- Low Voltage Directive LVD 2006/95/WE, norm PN-EN 60598-1
- Directive EMC 2004/108/WE, norms: PN-EN 55015, PN-EN 61547, PN-EN 61000-3-2, PN-EN 61000-3-3
- surface: polished aluminium
- anodizing in 10 colours each with possibility of brightening
- option of powder painting in RAL colours (other colours available on request)
- elastomer protection option in the color of the column to a height of 350 mm (other height on request)
- ROSA standard wiring chamber
- packing: sleeve material / bubble foil