


Aluminium column SAL DS-87

diameter 146 mm at the base plate

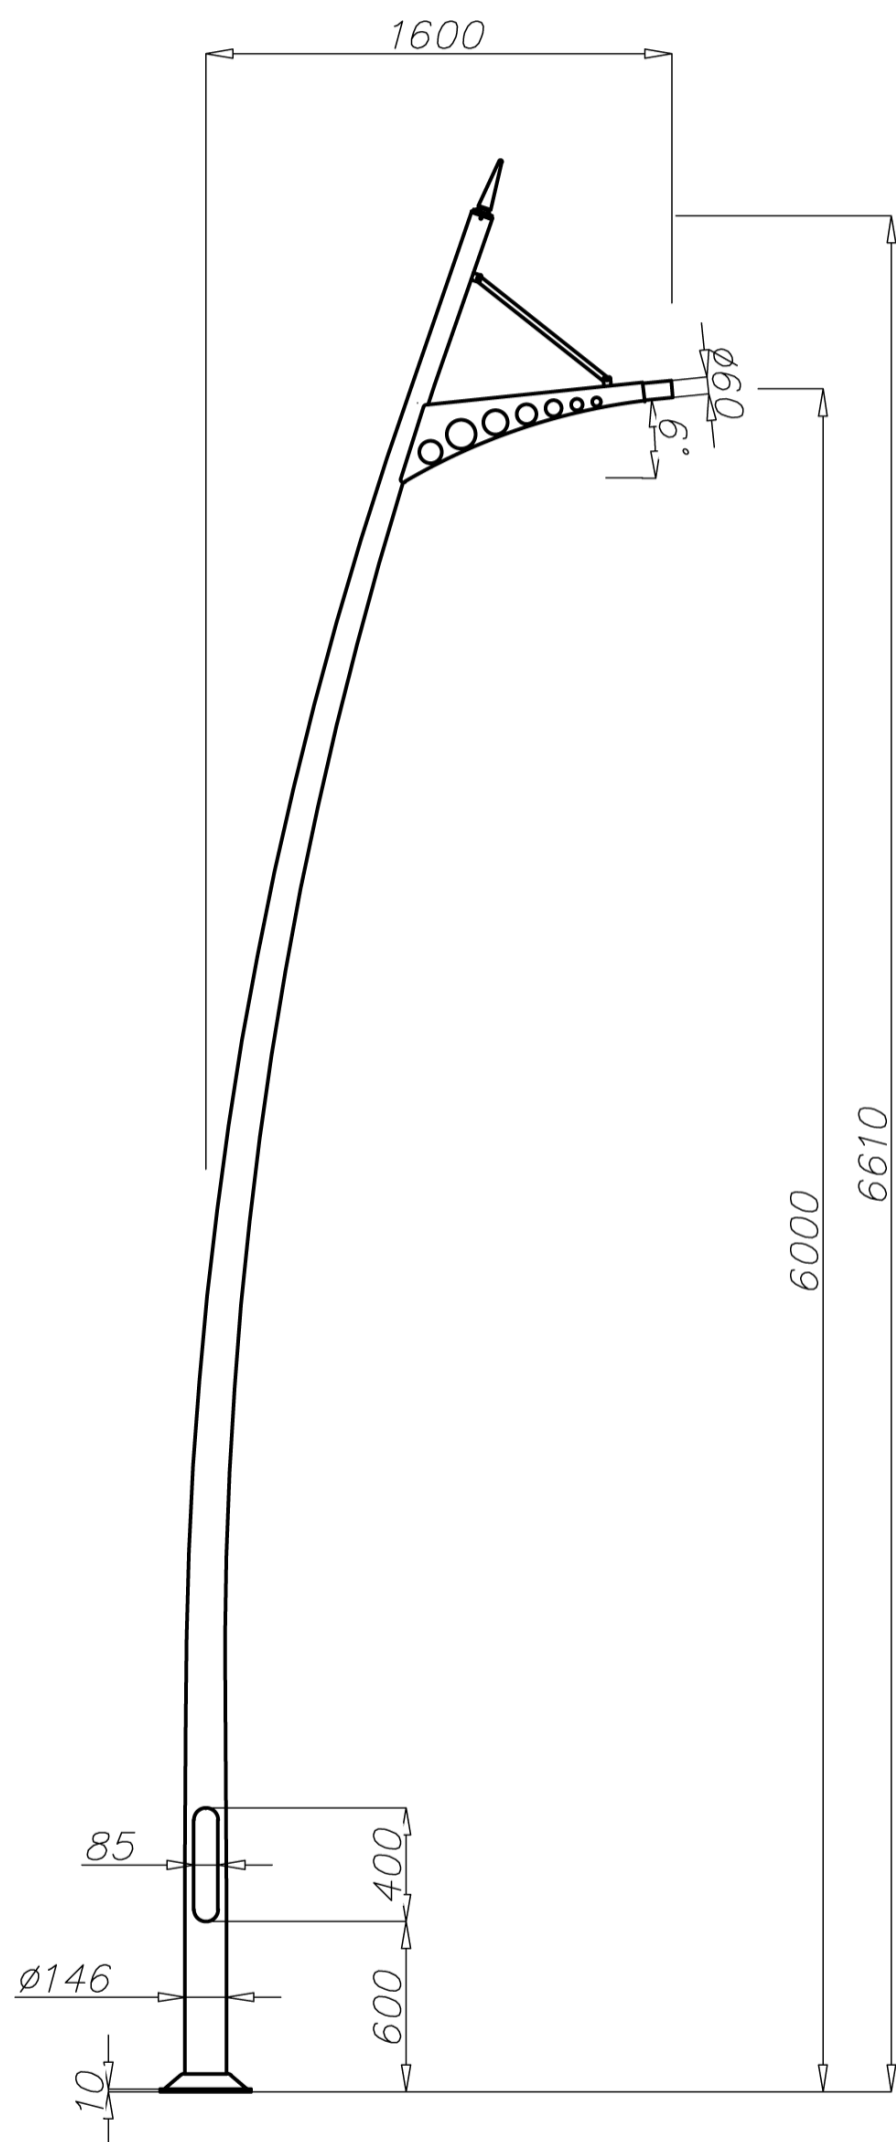

Technical data

Aluminium Column	SAL DS-87
Product code	42976
Column height H [m]	6,6
Wall thickness [mm]	4,2
Net weight [kg]	34,1
Volume [m ³]	0,661
Post top column	luminaires with $\varnothing 60$ spigot entry with weight and windage not exceeding data in resistance calculations
Concrete footing / reinforcement basket	B-60 / Z-60
Concrete footing code / reinforcement	311160 / 311206
Hot galvanized nut set / Hot galvanized ripable nut set	4008 / 4009

Resistance calculations

SAL DS-87 code 42976	acceptable windage of single luminaire [m ²] for $C_x=0,7$			
	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
acceptable mass of a single luminaire [kg]	I zone, III location category	I and III zone, III location category to 450 m AMSL	II zone, III location category	III zone, III location category to 755 m AMSL
15	0,58	0,48	0,32	0,27

- surface: polished aluminium
- anodising in 10 colours, each with possibility of brightening
- option of powder painting in RAL colours (other colours available on request)
- elastomer protection option in the color of the column to a height of 350 mm (other height on request)
- ROSA standard wiring chamber
- packing: sleeve material
- option connect decorative light top: small shining spike $\varnothing 76$, big shining spike $\varnothing 76$, shining ball $\varnothing 76$

